


GUHRING

- nanoFIRE-coating for maximum performance in **high-alloyed materials and special alloys**
- 8% cobalt-alloyed HSCO steel for **maximum performance at high temperatures**
- especially stable tool design with 135° split point

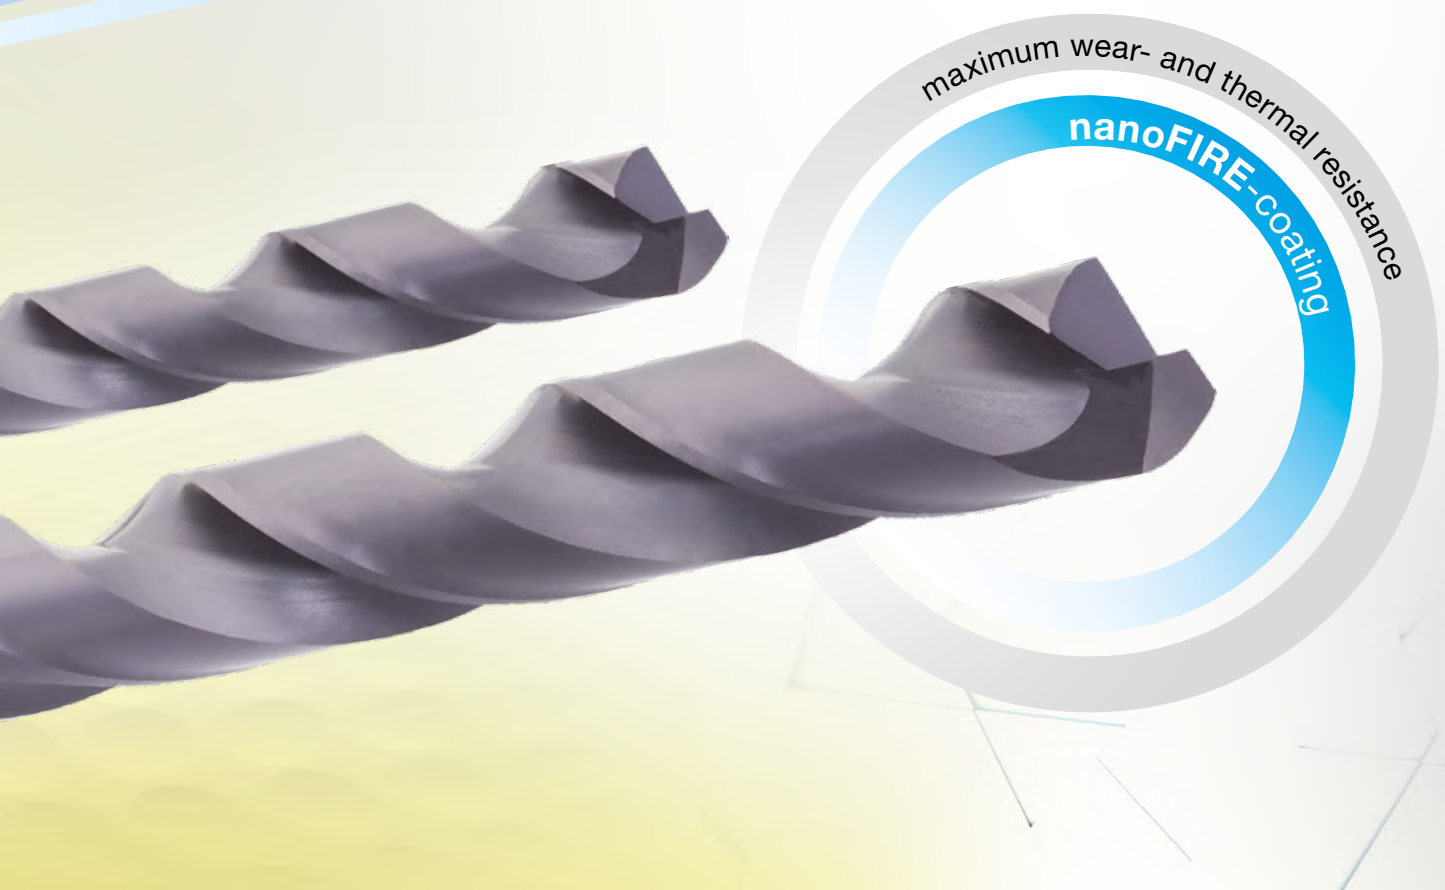

M42-Twist drill

for the machining of high-alloyed,
high-tensile materials and special alloys

GUHRING – YOUR WORLD-WIDE PARTNER

M42-Twist drill

for the machining of high-alloyed,
high-tensile materials and special alloys

- standard range
- Ø 1.00 - 16.00 mm

Very stable drill design


Specially reinforced core for
maximum tool stability in
difficult-to-machine materials

Tool material

8% cobalt-alloyed high-speed
steel for longer tool life and
high thermal resistance enables
operations in difficult-to-machine
materials or at high temperatures

135°-split point


accurate spotting without centre
punching or centering

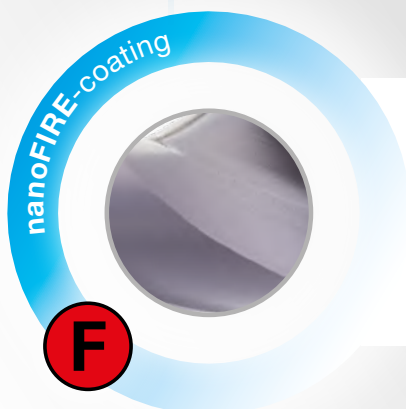

As well as nitrogen and titanium the multi-layer nanoFIRE-coating also contains aluminium which provides the extreme thermal- and wear-resistance property in the established Guhring coating. It features a high hardness and possesses an outstanding thermo-chemical resistance making nanoFIRE predominantly suitable for the machining of high-tensile and high-alloyed materials.



Jobber drills




Tool material **M42**

Surface finish **F**

Cutting direction **R**

Discount group 139

- P** • Web thinning $\geq \varnothing$ 1.000 mm • optimised split point • 8% cobalt-alloyed HSCO high speed steel • especially high wear-resistance
- M** •
- K** • Hard/high-tensile alloy on CrNi basis • special alloys Hastelloy, Inconel, Nimonic • stainless-/acid-/heat-resistant steels • wear-resistant sheet metal • steel/bronze up to 1400 N/mm²
- N** ○
- S** •
- H** •

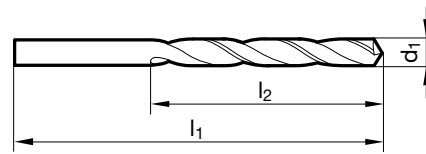

Guhring no. **1199**

d1		l1	l2	Availability	d1		l1	l2	Availability	d1		l1	l2	Availability
mm	inch	mm	mm		mm	inch	mm	mm		mm	inch	mm	mm	
1.000		34.00	12.00	•	4.760	3/16	86.00	52.00	•	8.500		117.00	75.00	•
1.100		36.00	14.00	•	4.800		86.00	52.00	•	8.600		125.00	81.00	•
1.200		38.00	16.00	•	4.900		86.00	52.00	•	8.700		125.00	81.00	•
1.300		38.00	16.00	•	5.000		86.00	52.00	•	8.730		125.00	81.00	•
1.400		40.00	18.00	•	5.100		86.00	52.00	•	8.800		125.00	81.00	•
1.500		40.00	18.00	•	5.160	13/64	86.00	52.00	•	8.900		125.00	81.00	•
1.590	1/16	43.00	20.00	•	5.200		86.00	52.00	•	9.000		125.00	81.00	•
1.600		43.00	20.00	•	5.300		86.00	52.00	•	9.100		125.00	81.00	•
1.700		43.00	20.00	•	5.400		93.00	57.00	•	9.200		125.00	81.00	•
1.800		46.00	22.00	•	5.500		93.00	57.00	•	9.300		125.00	81.00	•
1.900		46.00	22.00	•	5.600		93.00	57.00	•	9.400		125.00	81.00	•
2.000		49.00	24.00	•	5.700		93.00	57.00	•	9.500		125.00	81.00	•
2.100		49.00	24.00	•	5.800		93.00	57.00	•	9.600		133.00	87.00	•
2.200		53.00	27.00	•	5.900		93.00	57.00	•	9.700		133.00	87.00	•
2.300		53.00	27.00	•	5.950	15/64	93.00	57.00	•	9.800		133.00	87.00	•
2.380	3/32	57.00	30.00	•	6.000		93.00	57.00	•	9.900		133.00	87.00	•
2.400		57.00	30.00	•	6.100		101.00	63.00	•	9.920	25/64	133.00	87.00	•
2.500		57.00	30.00	•	6.200		101.00	63.00	•	10.000		133.00	87.00	•
2.600		57.00	30.00	•	6.300		101.00	63.00	•	10.100		133.00	87.00	•
2.700		61.00	33.00	•	6.350	1/4	101.00	63.00	•	10.200		133.00	87.00	•
2.800		61.00	33.00	•	6.400		101.00	63.00	•	10.500		133.00	87.00	•
2.900		61.00	33.00	•	6.500		101.00	63.00	•	10.800		142.00	94.00	•
3.000		61.00	33.00	•	6.600		101.00	63.00	•	11.000		142.00	94.00	•
3.100		65.00	36.00	•	6.700		101.00	63.00	•	11.200		142.00	94.00	•
3.170	1/8	65.00	36.00	•	6.750	17/64	109.00	69.00	•	11.500		142.00	94.00	•
3.200		65.00	36.00	•	6.800		109.00	69.00	•	11.800		142.00	94.00	•
3.300		65.00	36.00	•	6.900		109.00	69.00	•	11.910	15/32	151.00	101.00	•
3.400		70.00	39.00	•	7.000		109.00	69.00	•	12.000		151.00	101.00	•
3.500		70.00	39.00	•	7.100		109.00	69.00	•	12.200		151.00	101.00	•
3.600		70.00	39.00	•	7.200		109.00	69.00	•	12.500		151.00	101.00	•
3.700		70.00	39.00	•	7.300		109.00	69.00	•	13.000		151.00	101.00	•
3.800		75.00	43.00	•	7.400		109.00	69.00	•	14.000		160.00	108.00	•
3.900		75.00	43.00	•	7.500		109.00	69.00	•	15.000		169.00	114.00	•
3.970	5/32	75.00	43.00	•	7.600		117.00	75.00	•	16.000		178.00	120.00	•
4.000		75.00	43.00	•	7.700		117.00	75.00	•					
4.100		75.00	43.00	•	7.800		117.00	75.00	•					
4.200		75.00	43.00	•	7.900		117.00	75.00	•					
4.300		80.00	47.00	•	8.000		117.00	75.00	•					
4.400		80.00	47.00	•	8.100		117.00	75.00	•					
4.500		80.00	47.00	•	8.200		117.00	75.00	•					
4.600		80.00	47.00	•	8.300		117.00	75.00	•					
4.700		80.00	47.00	•	8.400		117.00	75.00	•					

DRILLING

TAPPING/THREAD MILLING/
FLUTELESS TAPPING

MILLING

REAMING

PCD



SPECIAL SOLUTIONS COUNTERSINKING

MODULAR SYSTEMS

SERVICES

GUHRING

Guhring KG

P.O. Box 100247 • 72423 Albstadt
Herderstraße 50-54 • 72458 Albstadt

Tel. +49 74 31 17-0
Fax +49 74 31 17-21279

info@guehring.de
www.guehring.de

No liability can be accepted for printing errors or technical changes of any kind.
Our Conditions of Sale and Terms of Payment apply. Available on request.

All prices are excluding VAT, price list 43.